

[Get a Quote](#)

## Overview

WS-C2960L-8TS-LL offering 8 x GigE ports, 2 x 1G SFP and LAN Lite, is one of the Cisco Catalyst 2960-L Series Switches. These 2960-L switches are fixed-configuration, Gigabit Ethernet switches that provide entry-level enterprise-class Layer 2 access for branch offices, conventional workspaces, and out-of-wiring closet applications. Designed for operational simplicity to lower total cost of ownership, they enable secure and energy-efficient business operations with a range of Cisco IOS Software features.

### Quick Specs

Figure 1 shows the appearance of WS-C2960L-8TS-LL.

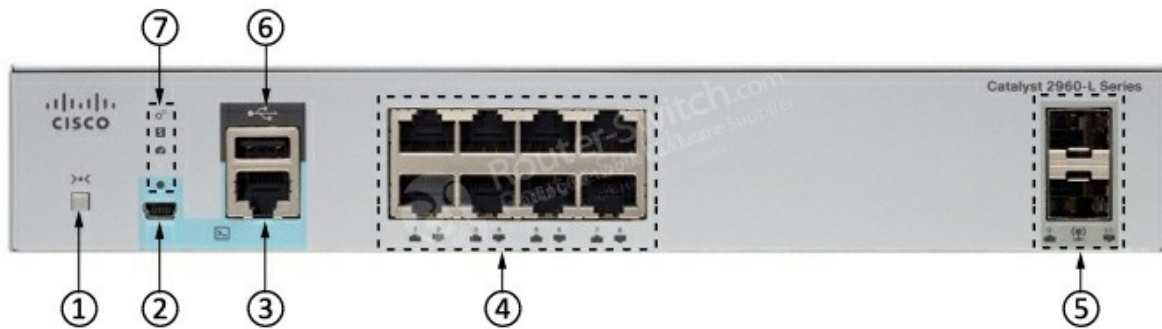


Table 1 shows the Quick Specs.

<b>Product Code</b>	WS-C2960L-8TS-LL
<b>IOS</b>	LAN Lite
<b>Forwarding bandwidth</b>	10 Gbps
<b>Switching bandwidth</b>	20 Gbps
<b>10/100/1000 Ethernet Ports</b>	8
<b>Uplink Interfaces</b>	2 x 1G SFP
<b>Fanless</b>	Y
<b>DRAM</b>	512 MB
<b>Flash memory</b>	256 MB
<b>Dimensions (H x D x W)</b>	1.73 x 8.45 x 10.56 in. (4.4 x 21.5 x 26.8 cm)
<b>Net Weight</b>	4.45 lb (2.02 kg)

### Product Details

Figure 2 shows the front panel of WS-C2960L-8TS-LL.



Note:

(1)	Mode button	(5)	SFP module slots
(2)	USB mini-Type B (console) port	(6)	USB Type A port
(3)	RJ-45 Console Port	(7)	System LEDs
(4)	8 x 10/100/1000 ports		

Figure 3 shows the back panel of WS-C2960L-8TS-LL.



Note:

(1)	Security Slot
(2)	A loop (for the optional power cord retainer)
(3)	An AC power connector

## The Accessories

Table 2 shows the recommended elements for the WS-C2960L-8TS-LL.

Model	Description
<a href="#">CAB-CONSOLE-USB</a>	Cisco CAB-CONSOLE-USB Console Cable 6 ft with USB Type A and mini-B
<a href="#">CAB-CONSOLE-RJ45</a>	Cisco CAB-CONSOLE-RJ45 Console Cable 6ft with RJ45 and DB9F
<a href="#">CAB-ACE=</a>	CAB-ACE= AC Power Cord (Europe), C13, CEE 7, 1.5M
<a href="#">CAB-ACU=</a>	CAB-ACU= AC Power Cord (UK), C13, BS 1363, 2.5m

## Compare to Similar Items

Table 3 shows the comparison of WS-C2960L-8TS-LL and WS-C2960L-8PS-LL.

Model	WS-C2960L-8TS-LL	<a href="#">WS-C2960L-8PS-LL</a>
IOS	LAN Lite	LAN Lite
Forwarding bandwidth	10 Gbps	10 Gbps
Switching bandwidth	20 Gbps	20 Gbps
10/100/1000 Ethernet Ports	8	8 PoE+
Available PoE Power	N/A	67W
Uplink Interfaces	2 x 1G SFP	2 x 1G SFP

## Get more information

Do you have any question about the WS-C2960L-8TS-LL?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

---

WS-C2960L-8TS-LL Specification	
<b>Configurations</b>	
10/100/1000 Ethernet Ports	8
Uplink Interfaces	2 SFP
Available PoE Power	-
Fanless	Y
Dimensions (H x D x W)	1.73 x 8.45 x 10.56 in. (4.4 x 21.5 x 26.8 cm)
Net Weight	4.45 lb (2.02 kg)
<b>Console Ports</b>	
RJ45 Ethernet	1
USB mini-B	1
USB-A port for storage and Bluetooth console	1
<b>Memory and Processor</b>	
CPU	ARMv7 800 MHz
DRAM	512 MB
Flash memory	256 MB
<b>Performance</b>	
Forwarding bandwidth	10 Gbps
Switching bandwidth	20 Gbps

<b>Forwarding rate (64-byte L3 packets)</b>	14.88 Mpps
<b>Unicast MAC addresses</b>	8K
<b>Maximum active VLANs</b>	64
<b>VLAN IDs available</b>	4094
<b>Maximum STP instances</b>	64
<b>Maximum SPAN sessions</b>	1
<b>MTU-L3 packet</b>	9198 bytes
<b>Jumbo Ethernet frame</b>	10,240 bytes
<b>MTBF in hours (Data)</b>	2,448,133
<b>MTBF in hours (PoE)</b>	315,044
<b>Environment</b>	
<b>Operating temperature</b>	
<b>Up to 5,000 ft</b>	23°F to 113°F (-5°C to 45°C)
<b>Up to 10,000 ft</b>	23°F to 104°F (-5°C to 40°C)
<b>Operating altitude</b>	10,000 ft (3000m)
<b>Operating relative humidity</b>	5% to 90% at 40°C
<b>Storage temperature</b>	-13° to 158°F (-25° to 70°C)
<b>Storage altitude</b>	15,000 ft (4500m)
<b>Storage relative humidity</b>	5% to 95% at 65°C
<b>Storage altitude</b>	Minimum ambient temperature for cold start is 0°C (32°F)
<b>Electrical</b>	Data
<b>Voltage (autoranging)</b>	110 to 220V AC in
<b>Frequency</b>	50 to 60 Hz
<b>Current</b>	0.13A to 0.22A
<b>Power rating (maximum consumption)</b>	0.04 kVA
<b>Power consumption (watts)</b>	
0% traffic	13.0
10% traffic	14.8
100% traffic	14.9
Weighted average	14.2
<b>Safety and Compliance</b>	
<b>Safety</b>	UL 60950-1 Second Edition, CAN/CSA-C22.2 No. 60950-1 Second Edition, EN 60950-1 Second Edition, IEC 60950-1 Second Edition, AS/NZS 60950-1
<b>EMC: emissions</b>	47CFR Part 15 (CFR 47) Class A, AS/NZS CISPR22 Class A, CISPR22 Class A, EN55022 Class A, ICES003 Class A, VCCI Class A, EN61000-3-2, EN61000-3-3, KN22 Class A, CNS13438 Class A
<b>EMC: immunity</b>	EN55024, CISPR24, EN300386, KN24
<b>Environmental</b>	Reduction of Hazardous Substances (RoHS) including Directive 2011/65/EU

<b>Telco</b>	Common Language Equipment Identifier (CLEI) code
<b>U.S. government certifications</b>	USGv6 and IPv6 Ready Logo
<b>Connectors and Interfaces</b>	
<b>Ethernet interfaces</b>	10BASE-T ports: RJ-45 connectors, 2-pair Category 3, 4, or 5 unshielded twisted-pair (UTP) cabling
	100BASE-TX ports: RJ-45 connectors, 2-pair Category 5 UTP cabling
	1000BASE-T ports: RJ-45 connectors, 4-pair Category 5 UTP cabling
	1000BASE-T SFP-based ports: RJ-45 connectors, 4-pair Category 5 UTP cabling
<b>Indicator LEDs</b>	Per-port status: link integrity, disabled, activity, speed, and full duplex
	System status: system, PoE, and link speed
<b>Console cables</b>	CAB-CONSOLE-RJ45 Console cable 6 ft. with RJ-45
	CAB-CONSOLE-USB Console cable 6 ft. with USB Type A and mini-B connectors
<b>Power</b>	Use the supplied AC power cord to connect the AC power connector to an AC power outlet

## Download Resource

---

### Selection Decision

 [Cisco's New Switch Selection Decision 2018](#)

### Support and Resources

 [Cisco Catalyst 2960-L Series Switch Datasheet](#)

### Transition Guide

 [Cisco Catalyst 2960/2960-SF/2960-S Series Transition Guide](#)

 [Guide to Upgrade Cisco Access and Backbone Switch](#)

 [Selecting Cisco Switches-Campus, Branch, Digital Building](#)

## Want to Buy

---

[Order Now](#)

[Get a Quote](#)

## Why Router-switch.com

---

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)